



**BONN HUNGARY
ELECTRONICS**

**DC - 2500 MHz / 20 W
BROADBAND TERMINATION**

BTMW10
NDS # 785

an ISO 9001 Certified Company



- **IDEAL FOR THE GSM / DCS / UMTS SYSTEMS**
- **COMPACT SIZE**
- **LOW VSWR**

This broadband termination is intended for use in GSM, DCS and UMTS systems where proper termination is required. Due to its compact size it can be used effectively in these communication systems.


ELECTRICAL CHARACTERISTICS :

Frequency Band	DC to 2500 MHz
Maximum RF Power	20 W
Reflection	< -25 dB typ., min -20 dB
Measured 3th order IM products (*)	-130 dBc typ.
Impedance	50 ohm
Connectors	7/16 – female (N connector optional)
Operating Temperature Range	- 30 to + 70°C

(*) measured 2x40 dBm @ 950 MHz

Specifications are subject to change without notice.

OUTLINE DIMENSIONS (mm):

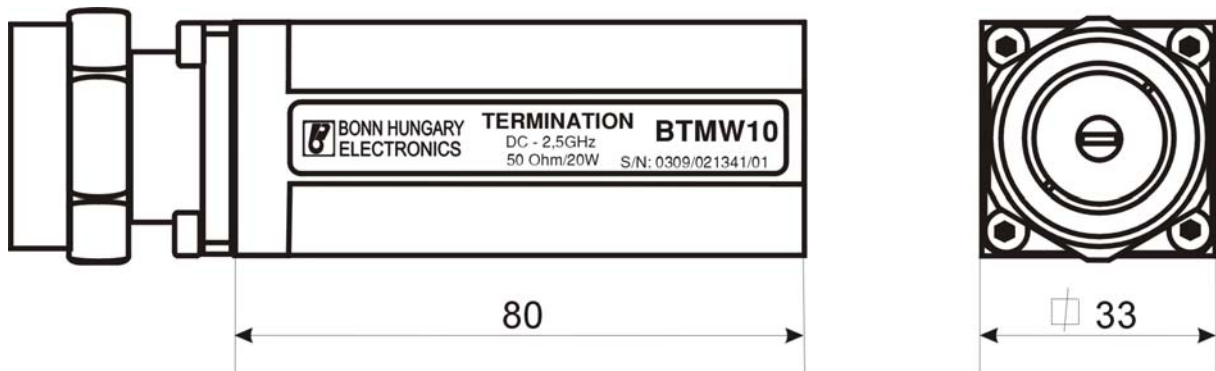

BONN Elektronik 
RF Systems, Instruments and Components

Rudolf-Diesel-Str.18 · D-85521 Ottobrunn · Tel +49 (0)89/608 754-0 · Fax +49 (0)89/608 754-99
email: info@bonn-elektronik.com · home: www.bonn-elektronik.com